


APD 1250 C

Motor : Cummins
Alternatör : Aksa
Kontrol Sistemi : P 732



ISO8528

6i 'YbYfUf f [fi Vi 'GC ,) & , 'm bYfa Y'L' UfhUfibi' _Uf i'UntUW' _gYj]nYXY' hUgUfUba i' hif'

SZUTEST

6i 'YbYfUf f [fi Vi 'GC - \$\$\$gYfhZ_U' nY' _Yf]bY [" fY' hUgUfUba i' j Y' fYh'a] hif'



6i 'YbYfUf f [fi Vi '79'gYfhZ_U' UfhUfibiU'i m] i bXi f

2000/14/EC

GYG'mUih'a _UV]b [[fi d'Ufz&\$\$\$#/(#97 '5j fi dU [' f' h' m bYfa Y'] bY [" fY' hYghYX]]f'

u] ; 'WZ' !: Uniz) \$<nz; : '\$z

Voltaj	Standby Güç (ESP)		Prime Güç (PRP)		
	kVA	kw	kVA	kw	Amp
400/230	1250,00	1000,00			

Standby Güç (ESP): ; 'jYb]f' YVY_Y' _UnbU' ibib'_Yg]a Yg]Xi fi a i bXUZXY] _YbYY_hf_]m_Y [' , fYa]b_Yfa YXY'_i 'Ubrif'9GDz-GC ,) & , 'Yi m'a i' Xi f'5 ifi m'_Ya YnY']n]b] Yf]a Ya] hif'

Prime Güç (PRP): 8Y] _YbYY_hf_]m_Yz [' , fYa]b_Yfa YXY'zmi'_gibifgin' , U'i a U' gUUh]]b'_i 'Ubrif'DF DZ-GC ,) & , 'Yi m'a i' Xi f'GC' \$(* mU [' fY' %&gUUh, U'i a U'dYf]ncXi bXU%gUUh%\$! ' U' ifi m'_Ya Y]]b'_i 'Ubrif'

GH5B85FH'x N9@@? @9F

Gi'gc i' ta U'iX]nY'a ctef
FUXnUf f] Y'a Y_Ub'_ZUb
8' bYb] Y'giWU'_dUF, UUFU'Xc'_i ba Um'i' b'YnYb'_cfi m' W'_UZyg
9'Y_hf_]a Uf' a ctefi j'Y' Uf^U'fYfbUf f'
5'_f] f i b'Ug]h]z'_UV'c'Ufi j' Y'gY\ dUgi
A ctef V'c'_gi m' igihVgi
uY'_L' UgY j' Y' hif'Y 'ja " b'Yn]WYHU'_cn'Uf
' fi d'U'ub Unfi m'U'ihU'_j'f5, i'gYh [fi d'k
9gbY'_mU'ihVU' 'Ubh' c'fhi a 'Ufi
HY'_mU'U'_iz] Y' < n'U'ih'a 'gibiZi' U'fYfbUf f'
9bX' g'f]nY'_UdUg]fYXY' gi ghi fi W' j' Y'YgbY'_ , Y'_L'_ca dYbgUf f'
9'Y'_fcb]_U'_ ' Uf^V^U'ni
'i 'Uba Uj' Y'a c'btU'^_Uj' i ni

>9B9F 5Hx F '8CB5B-A 'G9u9B9? @9F

MOTOR

! 'I nU'_fUXnUf f' 'gc i' ta U'
! 'MU'_ih]gi' UmifiWZ]hY'
! 'MU' 'igihVgi

ALTERNATÖR

! '-gihVz' fi h' VYh' b'Yn]WY'
! 'u'_i' ' U'fYf]

KONTROL PANOSU

! 'I nU'_HUb]Yf] 'ja j' Y'_cblfc'
! 'HcdfU'_U, U' iz'fY'_YbYfUf f'
! ' Uf^Ua dYfa YfYg]

YARDIMCI DONATILAR

! 'C'lea UH'_j YnU'a Ubi Y' n'U'_ihXci a 'g]gh'a]
! '8' ' _j Y' m'_g'_mU'_ihgYj]nYg] U'Ufa i'
- Egzoz susturucusu, meskûn mahal tip
! 'A i' \UZUn'_UV]b] /gYg' n'U'ih'a 'i' h'd] j' YnU'U, i'_U'Ub' h'd
! '5'YhU'_ja i' fVU'_ja] ,]b'k
! '% \$\$\$ \$\$\$, U'i a U'gUUh]]]b' VU'_ja 'gYh
! '5b]hZ]n] j' Y'a ctef m'U' 'Ua U'mU' i' fi' '\$\$7' , Yj fY' giWU'_i'] ,]b'k
! '5bU' MU'_ihHUb'_i

TRANSFER PANOSU

- Üç veya dört kutuplu transfer sistemi
! 'y, j' YnU'X' f'h'_j h' d'i' a ctefi] , i'_i' ' U'fYf]

8 N9@A C H C F 'x N9@@? @9F

Üretici		Cummins		
Model		KTA 38-G9		
G]j]bX]f]j Y`HUgUfia		12 Silindirli, V - Tip		
Hava Emme		Hi fVc` UF`Y]j Y`Gcb Gc i h W`i		
Maksimum Standby Güç		1500 d/dk		
		1089,00 kw [1460,00HP]		
Toplam Silindir Hacmi	L	37,800		
Çap ve Strok	mm	159 X 159		
Gıı hıfa U`C fUbi		13,9:1		
Norminal Devir	d/dk	1500		
Governör Tipi		Elektronik		
MU`? UdUg]Yg]	L	135,00		
Su Kapasitesi	L	279,00		
Emilen Hava Debisi	m ³ /dk.	78,54		
Radyatör Hava Debisi	m ³ /dk.	573,00		
Egzoz Gaz Debisi	m ³ /dk.	212,40		
9[ncn; Un`GiWU`ı İ	° C	529,00		
Elektrik Sistemi		24 V d.c.		
MU`ihH`_Yfja]	Yük	%100	%75	%50
	L/sa	256,00	196,00	137,00


5@H9F B 5Hx F 'x N9@@? @9F

Üretici		Aksa		
Modeli		AK7910		
Frekans	Hz	50		
Güç	kVA	1137,50		
HUgUfia		: if, Uginž(`ı h d`i		
Cos fi		0,80		
: Un`GUnigi		3		
Voltaj	V	400/230		
5_ia	A	1641,80		
MU`ihıa `GibiZ		H		
_Un`G]ghYa]		Elektronik (AVR)		

6CM H]j Y`5 ₺ @?

5, İ; fi d	? i fi `5 ifi_	Boy	En	Yükseklik	MU`ih8Ydc`? UdUg]Yg]
	kg.	mm.	mm.	mm.	L
APD 1250 C	8600,00	4560,00	1850,00	2300,00	
Kabinli Grup	? i fi `5 ifi_	Boy	En	Yükseklik	MU`ih8Ydc`? UdUg]Yg]
	kg.	mm.	mm.	mm.	L
AK 96	13100	7500	2300	3170	1500

P 732 - Kontrol Sistemi

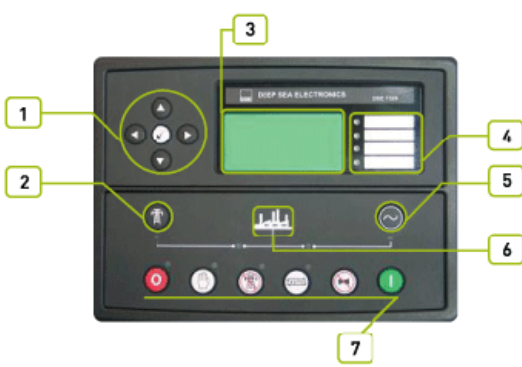

- 1 A Yb~'bUj][Ugncb'Vi hcb'Ufi
- 2 YVY_Yj Y'fUbgZf'Vi hcbi
- 3 @78'jYj 'Yha Y'Xi fi a 'Ufi'j Y'' , a Y [" gYf[Y'Yf]
- 4 5finU'U'Ufa '@98fYf]
- 5 Jeneratör ve transfer butonu
- 6 Durum Led'leri
- 7 uU'i a U' _Y_]gY, a Y Vi hcb'Ufi

Cihazlar

8G9ž'a cXY''+ ' &\$'C hca UH_ ' YVY_Y'5finU'jnYa Yj Y'YbYFUH' f_cbfhc''a cX''
9'Y_hfcb]_U_' ' UF'V\Un'i
5VY'Xi fXi fa U'Vi hcbi 'j Y'_cbfhc''XYj fY'Yfj] ,]b'g][cftU'Uf

Müdi'j Y'6cniU

7]\Un'Uf , Y]_gUWU']a U'YX]a] ' dUbc'_UV]b]bY'a cbHU'ntüdi'if''Dübc'gUWZc'gZU'h_]a ntUgU'i']Y'_Ud'UbUfU'_gUW
m'nYmj'_cfcncbU'X]fYb ,]'\U'Y [Y'hj]f''Dc'mYghYfV]Y]_hcn'VcnU'j Y Zf'ib'Ua U] 'Ya]]Y'dUbc'_UV]b]bY'gcb'XYfYVW
XUnübi_'i'VcnU'ntüdi'if''?]]h]j Y'a YbY' Y']dUbc'_UdU 'i']Y V\Un'UfU'i 'U a U'_c'UmXif''

Montaj

? cbfhc''dUbcgi ž'YbYFUH' f [fi Vi ' Ug]g]''nYf]bXY_]jgU 'Ua ; Y]_Unü_Uf]j YntU [, ;]_i 'Y'Yfa]bU'a cX''''nYf]bY
a cbHU'ntüdi'if''
DUbcž'YbYFUH' f [fi Vi bi b'ntü'U'FUZbUz [" n\]nUgi'gYj]nYg]bY'nYfY 'h]j]f''

Jeneratör Kontrol Ünitesi

8G9'+ ' &\$

&&\$'_j 5 j Y''nYf] YbYFUH' f [fi d'Ufia inXU'8G9+' &\$'_cbfhc''g]gY'a]ghUbXUfXif''9'Y_hfcb]_j Y'Y'Y_hfcb]_c'a Unü'ub
[Un]j Y'X]nY'a c'cf' YbYFUH' f [fi d'Ufibib'c'hca UH_'c'UfU_ , U'i h'ifa Ugi'j Y'Xi fXi fi 'a Ugi' ,]b'UgUf'Uba 'i' hif''
5nfiW'U'a cX'' YVY_Yj c'U'fbi'j Y'ZY_Ubgibi'jn'Yf]j Y'nYXY_'YbYFUH' f [fi Vi]Y'cbU'VU 'i [, 'fUbgZf'g]gY'a]b]
_cbfhc''XYf''

Standart Özellikler

A]_fc'] 'Ya VY]Y'_cbfhc''ntüdi'a 'i' Xif
% &I '* ('d]_gY'ž@78 [" gYf[Y]Y V] []Yf'_c'Um'i'_U'c_'i bi f
A cX'''' b'dUbY]bXYb]j YntU'D7 j Y'ntüdi'a i'j Ugi'UgimU'dfc[fUa 'Ua U
M a i U_'h' 'i' 'a Ya VfU'U'Uj mY'j Y'VY 'h' 'i' 'a Yb~'bUj][Ugncb
9h.YfbYhj Y'F G&' &ž'F G(,) j Ugi'UgimU'i nU'_hUb']Yh] 'ja j Y'GA G]Y'fUdcf'U'a U
HUf] j Y'gUUh]Y'_UmihXYZYf]bXY'UfinU'c'Um'i'f] \$E [" gY'fa Y
uc_'i' hUf] j Y'gUUh]Y'a c'cf'Y [nYfg]n'Xi fi a i] Y'VU_'ia 'dfc[fUa i
? cbfhc''h' 'Ufi.' Ghcdž'A Ubi Y'ž'c'hca UH_ž'HYghž'GHUfž'GYgg]n'#@Ua VU'Y'ghž
>YbYFUH' fY'fUbgZf'ž' YVY_YnY'fUbgZf'ž'A Yb~'bUj][Ugncb
A c'cf'V'c_'gi m'i'gihW'_cbfhc''

APD 1250 C

Motor : Cummins
Alternatör : Aksa
Kontrol Sistemi : P 732



Ölçme Göstergeleri

A C H C F
A c h c f X Y j] f]
M U _ V U g i b W
G i _ g i W _ i _ i
u U i _ a _ U g U U j
5 _ j c U i f
A c h c f V U _ j a _ n U a U b i [Y _ a]
> 9 B 9 F 5 H x F
J c U i f @ _ z @ B t
5 _ j a _ f @ _ z @ B t
: f Y _ U b g
H c d f U _ _ U , U i
_ K
7 c g j
_ j 5 f
_ K \ z _ j 5 \ z _ j 5 f
: U n g i f U g i
9 6 9 ? 9
J c U i > f @ _ z @ B t
: f Y _ U b g

Koruma Devreleri

? 5 N
U f ^ U f i n U g i
8 ^ _ _ U _ j c U i f
G h c d U f i n U g i
8 ^ _ _ n U _ i h g Y j] n Y g] f t c d g t
_ K _ U i f i m _
H Y f g Z J n g i f U g i
< i n g] b m U] _ U n i d
x B ! 5 @ 5 F A @ 5 F
8 ^ _ _ n U _ V U g i b W
M _ g Y _ a c h c f g i W _ i _ i
8 ^ _ _ a c h c f g i W _ i _ i
8 ^ _ _ # M _ g Y _ a c h c f \ i n i
8 ^ _ _ # M _ g Y _ Y b Y f U h f Z Y _ U b g i
8 ^ _ _ # M _ g Y _ Y b Y f U h f j c U i f
9 7 I _] U n
8 I F 8 I F A 5 ' 5 @ 5 F A @ 5 F =
G H f h U f i n U g i
5 W g h c d
8 ^ _ _ n U _ V U g i b W
M _ g Y _ a c h c f g i W _ i _ i
8 ^ _ _ g i _ g Y j] n Y g]
8 ^ _ _ # M _ g Y _ a c h c f \ i n i
8 ^ _ _ # M _ g Y _ Y b Y f U h f Z Y _ U b g i
8 ^ _ _ # M _ g Y _ Y b Y f U h f j c U i f
M U _ V U g i b , U [i _ U n i W U , i _ X Y j f Y
: U n m b
9 @ 9 ? H F ? G 9 @ 5 u A 5
H c d f U _ _ U , U i
_ K _ U i f i m _
> Y b Y f U h f U i f i U _ j a
H Y f g Z J n g i f U g i

Opsiyon Özellikleri

M _ g Y _ n U _ g i W _ i _ i ! X i f X i f a U
8 ^ _ _ n U _ i h g Y j] n Y g] ! X i f X i f a U
8 ^ _ _ n U _ i h g Y j] n Y g] ! U U f a
M _ g Y _ n U _ i h g Y j] n Y g] ! U U f a
; 9 B _ @ 9 A 9 ' A C 8 y @ 9 F
_ U j Y @ 9 8 ' a c X _ _ f &) (, t
; Y b] ' a f ^ Y ' a c X _ _ f & %) + t
; Y b] Y a [] f] ' a c X _ _ f & % \$ t

Standartlar

9 Y Y _ h f] g Y ; _ j Y b] _ # 9 A 7 i n i b i _
6 G 9 B * \$ -) \$ 9 Y _ h f] _]] V U n U f i
6 G 9 B * % \$ \$! * ! & 9 A 7 ' a i U Z n Y h
6 G 9 B * % \$ \$! * ! (' 9 A 7 ' Y a] g n c b g h U b X U f i

9 Y _ h f c b] _ 5 _ _ U f ^ 7] U n i

5 _ _ U f ^ V U n i g k] h W] b [! a c X Y j Y ' G A 8 H Y _ b c ' c] g]] Y _ _ f Y] a] X] f j Y _ m _ g Y _ j Y f] a Y _ g U \ d h f
5 _ _ Z j ! = _ U f U _ h Y f] g h _ Y f] g] b Y [' f Y _ U f ^ Y X]] f
7] U n i , i _ i _ i g U X Y j f Y n Y _ U f _ i _ c f i b a i _ h f
& (\$) _ U f ^ V U n i z] b Y Y f _ U f ^ V U n U f i b U [' f Y X U \ U j Y f] a ' z i n i b " a _ f _ z U f i n U c f U b i ' X U \ U X _ _ z \ U Z j Y i g i n U m a U g i , c _
X _ _ h f
H Y f g _ j h d V U _ U b h g i b U _ U f _ i _ c f i b a i _ h f
_ U f ^ U f i n U g i , i _ i _ i a Y j W h i f
;] f] j c U i f : % , ! & * (J "
u i _ i _ U _ j a i . & + z J j Y n U % z J) 5 "

APD 1250 C

Motor : Cummins
Alternatör : Aksa
Kontrol Sistemi : P 732



- 1 u Y_ l' d'fcZ' j Y' gU, H']a U' 'U' imW_ Uf_ Ug' mUdi
- 2 u Y_ l' gU, B' XUb']a U' d'UbY' Yf']Y' _UV] b' c' i i a i
- 3 Acil durdurma butonu
- 4 ? cblfc' d'Ubcbi 'Uf_ U' H' U' ZU' UgYnY' a cblU' Y'
- 5 ? UV' c' ; i_ i' Uf_ UXUb' j YmU' U' H' U' b
- 6 ? cfcnc' bU' XU' n' U' b' i_ i']' j' h' Y' a Yb' H' Y' Yf'
- 7 MU' 'Vc' U' ta' U' a c' f' c' n' Yf']b' X' Y' j UbU']Y'
- 8 Egzoz sistemi kabin içinde, gizli
- 9 < Yf']']' H' U' ZU' VU' ja i' 'c' UmU' h' f' U' b']']' h' Y' b' YV']' f' [Yb'] ' _Udi' Uf'
- 10 MU' ih' XYd' c' g' i' ' _UV] b']' b' ' b' H' U' ZU' b' XU' Z' U' n' f' i' V']' f']' h' Y' b' YV']' f' _Udi']Y' i' 'U' i' f'
- 11 ? U' Xifa U' j Y' H' U' ia U' bc' H' U' g' i' _UV] b' i' n' Yf']b' X' Y' Z' _cb' H' Y' n' b' i' f' a' U' d' U' g' i' ' Y' _]' b' X' Y'
- 12 Radyatör su dolumu için kapak
- 13 GYg' n' U' i' h' a' 'a' U' n' Y' a' Y' Yf'
- 14 HUj' UbU' ; i_ i' ;]' b' VU' ga U' _' a' Yf' X' j' Yb' "

y f' b' < U_ ibXU

GYg' n' U' i' h' a' i' j' Y' ? c' f' i' n' i' W' ? UV] b' Yf' 5_ gU' Yb' Yf' U' h' f' [fi' d' U' fi'] ;] b' U' i' g' h' _' a' ' \ Yb' X'] g' Yf'] H' U' ZU' b' XU' b' z' n' c' f' \ U' j' U' j' Y' ; Y' j' f' Y' U' f' i' b' U' i' m' i' b' [Y'] H' f'] Yb' g' Yg' n' U' i' h' a' i' z' _c' f' i' a' U' _UV] b' Yf'] /] X' Y' U' g' Yg' g' Y' j'] n' Y' g' j' j' Y' _c' f' i' a' U' g' U' ' U' n' U' W' U' _' Y' _] X' Y' H' U' g' U' f' U' b' i' f' U' r' 5_ gU' _UV] b' Yf'] z' d' U' f' ; U' d' U' f' ; U' g' _' _' YV']] f' z' a' c' X' _' Yf' m' U' d' i' XU' Z' [fi' VU' _c' U' m' g' Yf'] g' j' Y' VU' _ja' ' m' U' d' U' V'] a' Y' j' Y' ; U' i' h' i' i' n' Y' f' X' Y' d' U' f' ; U' X' Y']] a'] b' Y' c' Ub' U' _gU' _Uf' 5' n' b' i' n' U' a' Ub' XU' Yb' Yf' U' h' f' [fi' V' i' b' i' b' ; Y' j' f' Y' g' i' W' U' _i' ' i' b' U' [" f' Y' g' c' i' h' a' U' d' Y' f' z' c' f' a' U' b' g' i' j' Y' [; ; i_ i' X' Y' Yf'] b' X' Y' \ Y' f' U' b' [] g' j'] n' Y' X' _' _' _' _' _' a' Yn' X' U' b' U' [Y' h' f' a' Yn' Y' W' _' m' U' d' i' XU' c' a' U' g' i' b' U' X'] _U' h' Y' X'] Y' f' Y' _UV] b' Yf' X'] n' U' n' b' YX'] a'] X'] f' ? UV] b' Yf'] b' ; Y' j' f' Y' g' i' W' U' _i' j' Y' g' Y' g' Y' j'] n' Y' g' i' j' m' i' b' i' i' ;] b' d' f' c' h' U' j' d' H' Y' g' h' Y' f'] m' U' d' i' X' i' _H' U' b' g' c' b' f' U' _' f' Y' f' a'] m' U' d' i' a' i' h' f'

Standart Özellikler

8' _' _' d' f' c' Z' ' j' Y' _Ud' U' a' U' U' U' b' i' U' n' z' f' l' c' a' d' U' H' U' g' U' f' i' a
? UV] b' z' Yb' Yf' U' h' f' g' Y' h' z' Y' [n' c' n' g'] g' h' Y' a'] j' Y' n' U' _ih' X' Y' d' c' g' i' z' U' g'] H' Y' _d' U' _Y' h' c' U' f' U' _g' Y' _YX'] Y' W' _' _' Y' _] X' Y' z' V'] f' V'] b'] V' h' b' Yn' Y' W' _
j' Y' _c' U' m' a' c' b' H' U'] ;] b' [Y'] H' f'] a'] H' f' "
?] a' n' U' g' U' ' H' Y' a'] n' Y' a' Y'] _Y' a'] b' X' Y' b' [Y' ;] f'] Yb' z' _UV] b' ; Y' _] g' U' W' d' U' f' ; U' U' f' i' z' d' c' n' Y' g' h' Y' f' h' c' n' V' c' n' U' m' U' _Ud' U' b' i' f' j' Y' z' f' i' b' U' b' i' f'
5' Y' j' _' b' Yn' Y' W' n' U' i' h' a' i' g' b' [Yf']
G' Y' f'] g' b' c' H' U' U' f' i' b' U' _c' U' m' Y' f']] a'
? UV] b'] ; Yf'] g'] b' X' Y' Y' [n' c' n' g'] g' h' Y' a'] j' Y' i' g' i' n' U' i' h' a' i' _
_] H' U' ZU'] [Yb'] _Udi' Uf'
?]] h'] _Udi' _' n' Yf'] b' X' Y' _Y' ZU' z' d' Yb' W' f' Y' X' Y' b' _c' b' l' f' c' _d' U' b' c' g' i' b' i'] n' Yn' YV'] a' Y'
? UV] b'] b' X' i' i' b' U' a' c' b' H' U' Y' U' W' Y' g' h' c' d' V' i' h' c' b' i'
G' c' i' h' a' U' Z' U' b' i' j' Y' _Uf' ^U' H' Y' f' b' U' h' f' ^X' c' _i' b' a' U' n' U' _Uf' i' _c' f' i' b' a' i' h' i' f'
?]] h' Y' b' Yb' _Udi'] Y' n' U' _ih' X' c' i' a' i' j' Y' U' _' n' Y' Yf']] a'
U' g'] j' Y' _UV] b' i' n' Yf'] b' X' Y' _U' X' i' f' a' U' b' c' H' U' U' f' i'
G' Y' g' n' U' i' h' a' i' _UV] b'] [fi' d' U' f' i' b' g' Y' g' H' Y' g' h'] & \$\$\$ # / (# 9 7 n' Y' i' n' i' b' c' U' f' U' _G' n' i' H' Y' g' h' H' U' ZU' b' XU' b' X' Y' b' Y' h' Y' b' a' Y' _H' X'] f' "

En	mm.	2300
Boy	mm.	7500
Yükseklik	mm.	3170
MU_ ih' H' U' b' _? U' d' U' g'] H' Y' g']	L	1500