

ABG 10

Motor : Briggs&Stratton
 Alternatör : Mecc Alte
 Kontrol Sistemi : P 70



ISO8528

6i 'YbYfUhf f [fi Vi 'GC,) & 'm bYha Y] ' UfhUfibi 'Uf ' UntUWU 'gYj JnYXY 'UgUfUba i ' hf'

SZUTEST

6i 'YbYfUhf f [fi Vi 'GC - \$\$\$gYfhZ_U " nY 'L_Yf]by [" fY 'UgUfUba i ' j Y ' fY]a] hf'



6i 'YbYfUhf f [fi Vi '79'gYfhZ_U ' UfhUfibiU'i m] i bXmf

2000/14/EC

GYG'mU'ihä ' _UV]b] [fi d'Ufz&\$\$\$#(#97 '5j fi dU [' f ' h' m bYha Y]]bY [" fY 'YghYX]]f'

• ; ' , 'Yfz' !: Uniz) \$<nz; : '\$z

Voltaj	Standby Güç (ESP)		Prime Güç (PRP)		
	kVA	kW	kVA	kW	Amp
400/230	10.00	8.00	8.00	6.40	12.00

Standby Güç (ESP): ; ' j Yb]]f' YVY_Y 'UnbU 'ibib_Yg]a Yg]Xi fi a i bXUzXY] _Yb'YY_hf_]m_Y [' , 'Yä]b'Yha YXY_'i 'Ubirif"9GDz-GC,) & 'Y i ma 'i Xi f"5 ifi'm_Ya YnY]n]b j Yf]a Ya] hf'

Prime Güç (PRP): 8Y] _Yb'YY_hf_]m_Yz [' , 'Yä]b'Yha YXYzm'i 'gibifgin; U'i a U gUUh]]b_'i 'Ubirif"DF DZ-GC,) & 'Yi ma 'i Xi f"GC '\$ (* nU [" fY '%&gUUh, U'i a U'dYf]ncXi bXU%gUUh%\$i ' U ifi'm_Ya Y],]b_'i 'Ubirif"

• GH5B85F H'x N9@@? @9F

8c U [Un'ia ctef
 <Uj Ugc 'i ha U'ia ctef
 9Y_hf_]a Uf 'a ctefi j Y' Uf^U'YfUhf f'
 6U 'UnWU_'zflj f i b'Ug]h]E_UV'c'Ufi j Y'gY\duGi 'A ctef'W_Yhgi m' igihWgi
 HY_nU'U_'izj Y< nU'ihä 'gibiZi U'YfUhf f'
 9bX' gff]nY' _UdUg]YXY'gi gh fi W j Y'YgbY_'Y]_ca dYbgUhf f'
 9Y_hfcb]_U' : Uf^W^Unif'c'ha Uf_] [fi d'Uf'] bE
 ? i 'Uba Uj Y'a cbU^_Uj i ni

• >YbYfUhf f'8cbUbia 'GY, YbY_Yf]

YARDIMCI DONATILAR

! 'A i \UzUnU'_UV]b]/gYg'mU'ihä ' i'hd j YntU, i'_U'Ub'hd

ABG 10

Motor : Briggs&Stratton
 Alternatör : Mecc Alte
 Kontrol Sistemi : P 70

8c U[Un'6Ugib,] Yf]

Üretici	Briggs&Stratton	
Model	Vanguard	
G]]bXf] Y HUgUfia	2 Silindirli V Tip	
Hava Emme	8c U'9a]]	
Maksimum Standby Güç	1500 d/dk	kW[HP]
	3000 d/dk	10.0kW[HP]
Toplam Silindir Hacmi	L	0.6200
Çap ve Stroke	Çap ve Stroke	75,5 X 70
G]] hifa U' C fUbi	9:1	
Norminal Devir	d/dk	3000
Governör Tipi	Mekanik	
MU_ ihH' _Yhja]	m³ / sa	4,2
8c U[Un'6Ugib,	mbar	17-20
MU ' ?UdUg]Yg]	L	2
Emilen Hava Debisi	m³ /dk.	1
Egzoz Gaz Debisi	m³ /dk.	2
9[ncn'; Un'GiWU_ i	° C	500
uYj fYmY MUmi'Ub' egi	kW	5
Elektrik Sistemi	12	

Alternatör Özellikleri

Üretici	Mecc Alte	
Modeli	T20 FS- 130/A	
Güç	kW	10
HUgUfia	: if, Uginz&_j h d'i	
Cos fi	1	
: Un'GUmiği	3	
Voltaaj	V	400/230
5_ia	A	14
MU'ihia 'GibiZ	H	


6cmh jY'5 ifi_

5, i_); fi d	? i fi '5 ifi_	Boy	En	Yükseklik
	kg.	mm.	mm.	mm.
	125	880	620	690
Kabinli Grup	? i fi '5 ifi_	Boy	En	Yükseklik
	kg.	mm.	mm.	mm.
	220	1450	680	780

ABG 10

Motor : Briggs&Stratton
Alternatör : Mecc Alte
Kontrol Sistemi : P 70

● P 70 - Kontrol Sistemi

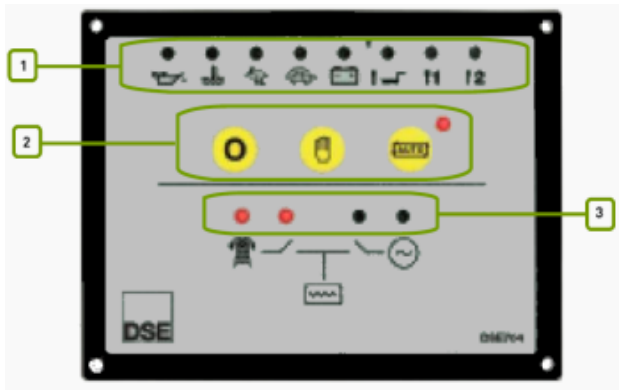

- 1 5 finU'U'Ufa '@98 fYf]
- 2 uÜi' a U' Y_]gY, a Y'Vi hcb'Üfi
- 3 Durum Led'leri

● Cihazlar

8G9ža cXY'+'\$('ctca UH_ ' YVY_Y UfinU'jnYa Yj Y'YbYfUht f'_cbfrc`'a cX`''
J c'ha YhfYZ\$!) \$J UvZ'+&l '+&a a
5a dYfa YhfYZ'+&l '+&a a
uÜi' a UnUa Ub'gUUhjz
9'Y_hfcb'_5_' ' Uf^V\Uniž) 5ž&&\$#&(\$ j c'h
5W' ghcd Vi hcbi ' j Y V&bfrc`XYj fY'Yf] ,]b'g][cftU'Uf
YVY_Yj Y'>YbYfUht f'fUbgZf'_cbHU_h fYf]žUfU'UfribXU'Y'Y_hf]_gY''_]hYa Yj Y'm_'hYfa]bU'Yf]

● Müdi'j Y'6cmÜ

7\Un'Uf, Y_]_gUvXUb'ja U'YX]a] 'dUbc'_UV]b]bY'a cbU'müdi'if" DUbc'gUW'Zc'gZUh_]a mÜgU'i]Y'_Ud'UbfU'_gUWm' nYn]
_cfcncnbU'X]fYb,]'U'Y [YHf]f" Dc'mYghYfV]Y]_hcn VcntU] Y Zfrib'Ua U] 'Ya]]Y'dUbc'_UV]b]bY'gcb'XYfYV'XU'ntübi'_i
VcntU'müdi'if"?]h]j Y'a YbHY 'Y]dUbc'_UdU 'i]Y V\Un'UfU'i 'U a U'_c'UnXif"

● Montaj

?cbfrc`dUbcgi ž YbYfUht f[fi Vi XUb'Unfi] Y'Xi j UfU'a cbU'müdi'UWU'_hdXYX]f" ?cbfrc`_UV'c'Ufi'YbYfUht f]Y'_cbfrc`
dUbcgi 'UfUgibXU'VU 'Ubi'Ufi'müdi'a i' hf"

● Jeneratör Kontrol Ünitesi

,]_j 5]Y'%+_j 5] [, 'UfU'i' ibXU'Xc U' [Un'müdi'ih'i'YbYfUht f[fi d'UfribXU'8G9'+\$('_cbfrc`'' b]hYg]'ghubXUfhc'UfU_
_j 'Ubi'if
; Un'a c'rcfi 'YbYfUht f[fi d'Ufribib'ctca UH_'c'UfU_], U'i' h'fi'a Ugi] Y'Xi fXi fi 'a Ugi]bi' [Yf, Y_Y' hf]f" YVY_Y'YbYf]g]
Yg]X]]bXY'j YntU] c'U'gY]]nYg]U'ifi'X' h' bXY'+\$('A cX' ž'YbYfUht f'ctca UH'c'UfU_], U'i' h'fi]j Y'm'_
YbYfUht fY'fUbgZf'YXYf" YVY_Y'j c'U'f'bcfa U'Y'X' bX' bXY'g]ghY'a 'm'_ 'YVY_Y'mYfUbgZf'YX]f"'+\$('_cbfrc`
a cX' '' b'dUbY']bXY', U'i' a U] Y'UfinU'Xi fi a i '@98' [" ghYf[Y'Yf]]Y [" ghYf]f"

"A]_fc!] 'Ya W]Y'_cbfrc`
@98' [" ghYf[Y'Yf
YVY_Y'j Y'YbYfUht f[, Yf]UfUgibXU'fUbgZf'_cbfrc`
>YbYfUht f'a U\U']bXY'ža cX' '' b'dUbY]' nYf]bXYb'dfc[fUa i'XY] hfYV]a Y
6i hcb'Ufib'mYfY 'ja]j Y] 'Yha Y'g]ghY'a]_c'Um
I nU'_hUb'ghUfh
?cbfrc`h' 'Ufi: 'Ghcd#F YgYhZA Ubi Y'ž'ctca UH_ž

ABG 10

Motor : Briggs&Stratton
 Alternatör : Mecc Alte
 Kontrol Sistemi : P 70

Ölçme Göstergeleri

A CHCF
 uUi a U'gUUj

>9B9F 5Hx F
 J c'U^f@&L
 5_ja 'f@&L

Opsiyon Özellikleri

M_gY_ntU 'giWU_İ İ! Xi fXi fa U

Koruma Devreleri

? 5N
 5_~' Uf^UfinUgi

8I F 8I FA 5'5@5FA @5F =
 GHUfhUfinUgi
 5Vj'gtd
 8~' ~_ntU 'VUgibW
 8~' ~_#5 ifi\in

Standartlar

9'Y_Y_flgY'; ~j Yb~_#9A 7'i n'i b'i_
 6G'9B '*%\$\$\$!*&'9A 7'a i UZ'nYhghUbxUfhi
 6G'9B '*%\$\$\$!*('9A 7'Ya jgnrcb'ghUbxUfhi

9'Y_fcb~_5_~' Uf^7\Uni

5_~' Uf^V\Uni'gk]H\X]b[!a cXY'j Y'GA 8'fY_bc'c'lgj]Y''fYf'a] X]f'j Y'm_gY~_j Yf]a Y'gU\]dHf"
 5_~_ZJ '!':~_UfU_hYf]gh_Y_f]g]bY [" fY' Uf^YX]f") 'Ua dYfz%&j c'h87 ;i~_j Yf]f";]f' j c'U^f% , !'&* \$j c'h57
 7\Un; i~_i ~_igU'XYj fYnY'_Uf i~_cfi ba i ~_h f"
 %&\$) ' Uf^V\Uniz~_bYYf' Uf^V\Un'UfibU [" fY'XU'Uj Yf]a ~_zi ni b" a ~_f~_ZUfinU'cfUbr'XU'UX' ~_~_Z\UZZ] Y'igi'mUna Ugi", c_
 X' ~_~_h f'HYfg~_j h d'VU 'UhgibU'_Uf i~_cfi ba i ~_h f
 Uf^UfinUgi, i~_i ~_a Yj W'hi f

ABG 10

Motor : Briggs&Stratton
 Alternatör : Mecc Alte
 Kontrol Sistemi : P 70

AKS 17 - Kabin



Yf b<U_ibXU

5_gU^YbYfUf f [fi d'Ufi],]b_U_i gh_ia ^\YbX]gYf]fUfUZbXUbžncf\Uj Uj Y, Yj fY' UfhUfibU'i n]i b [Y] hf]Yb'gYg'mU'iha iz _cfi a U'_UV]b'Yf]/XYU'gYg'gY]]nYg]j Y'_cfi a U'gu 'UmUWU'_ Y_]XY'fUgUf'Ubif'Uf", _J 5'!&+) _J 5' [^, 'UfU'i'ibXU^YbYfUf f [fi d'Ufi],]b'a cX^Yfz'gYg'mU'iha '_UV]b'Yf]zU, i_ [fi d' nYf]bY'Xc' fi XUb []nX]fa Y'mUdi'UV]a Y_'fYX]f" ? UV]b'Yfz [fi VU'_c:Um gYf]]g] Y'VU'ia 'mUdUV]a Y'j Y, U'i hi' i'nYfXY'dUf, U'XY]]a]bY'c'UbU'_gU 'Uf"5mb'i'nUa UbXU^YbYfUf f [fi Vi bi b', Yj fY giWU'_i'ibU' [" fY gc' i'fa U'dYfZ'fa Ubgi'j Y [^, ; i] ^XY' Yf]bXY^Yf'Ub []gY]]nY'X' ^ _ ^ 'a YmXUbU' [Y]fa YmYW'_mUdiXU c'a Ug]bU'X]_UhYX]YfY'_UV]b'YfX]nUmb'YX]a] X]f" ? UV]b'Yf]b', Yj fY'giWU'_i'j Y'gYg'gY]]nYg]i n]i b'i i],]b'dfchU]d fYghYf]mUdi'Xi'_U]b'gcbfU' fY]a]mUdi'a i' hf"

Standart Özellikler

i8' ^ _dfcZ']j Y'_Ud'Ua U'U'Ubi'Unž_ca dU_hfUgUfia
 i? UV]bž'YbYfUf f'gYhžY [ncn'g]g]fa]j Y'XYdc! UgY'fY'_dU_Yhc'UfU'_gY] _YX]YWU'_ Y_]XYžV]f]f]b]V' h' b'YmYW'_j Y'_c'Um a cbU'^,]b' [Y] hf]a] hf"
 iHYa]n'Ya Y] 'Ya]bXYb [Y,]f]Yb', Y_L [" j XYb]b'dUf, U'Ufiz'dc'nYg]f'f'cn'VcmUmu'_Ud'Ubif'j Y'ž'f'ib'Ubif
 i5'Yj " b'Ym]W'mU'iha 'g' b [Yf]
 iGYf]]g'bc'_hU'UfibU'_c'UmYf]]a
 i? UV]b], Yf]g]bXY'Y [ncn'g]g]fa]j Y'igi'mU'iha i
 i _]fUfUZU' [Yb] '_Udi'Uf
 i?]]h] '_Udi' nYf]bXY' YZUZdYbW'fYXYb'_cb]fc'd'Ubcbi bi]n'YmYV]a Y
 i? UV]b]b'Xi'ibU'a cbU'^'UW'ghcd'Vi' h'bi
 iGc' i'fa U'Zubi'j Y' Uf^U'f'f'Uf'f' Xc_i'ba UmU'_Uf' i'_cfi'ba i' hf
 i?]]h'YbYb'_Udi']Y'mU'ihXc'i'a i' j Y'U'_ nY'Yf]]a
 i UgY'j Y'_UV]b' nYf]bXY'_U'Xifa U'bc'_hU'Ufi'j Y' Ug]XY'Z'f'_]zhW'd'Yf]ž'5GA + \Uf],
 iGYg'mU'iha '_UV]b] [fi d'Ufib'gYg'fYg] &\$\$\$#& #97 nY'i n]i b'c'UfU'_Gni fYghfUfUZbXUb'XYbYhYba Y_'fYX]f"

Kabin Seri Modeli		AKS 17
En	mm.	680
Boy	mm.	1450
Yükseklik	mm.	780